

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT  
APPLICATION TRANSMITTAL LETTER

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Karl S. BEERS and Charles L. ANDERSON for MULTIPLE ASM OBIGGS WITH DIFFERENT PERMEABILITY AND SELECTIVITY MEMBRANES.

Also enclosed are:

- ☐ \_\_\_\_\_ sheet(s) of ☐ formal ☐ informal drawing(s);
- ☐ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☐ hereby made to \_\_\_\_\_  
filed in \_\_\_\_\_ on \_\_\_\_\_;  
☐ in the declaration;
- ☐ a certified copy of the priority document;
- ☐ a Constructive Petition for Extensions of Time;
- ☐ \_\_\_\_\_ statement(s) claiming small entity status;
- ☐ an Assignment document;
- ☐ an Information Disclosure Statement; and
- ☐ Other: \_\_\_\_\_.

The declaration of the inventor(s) ☐ also is enclosed ☒ will follow.

- ☐ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§119 and/or 365 to \_\_\_\_\_ filed in \_\_\_\_\_ on \_\_\_\_\_; the entire content of which is hereby incorporated by reference.--

The filing fee has been calculated as follows [ ] and in accordance with the enclosed preliminary amendment:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$790.00
Total Claims	30	MINUS 20 =	10	x \$22.00	\$220.00
Independent Claims	3	MINUS 3 =	0	x \$82.00	-0-
If multiple dependent claims are presented, add \$270.00					-0-
Total Application Fee					\$1010.00
If verified Statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					-0-
Add Assignment Recording Fee of \$40.00 if Assignment document is enclosed					-0-
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$1010.00</b>

☒ A check in the amount of \$ 1010.00 is enclosed for the fee due.

☐ Charge \$ \_\_\_\_\_ to Deposit Account No. 02-4800 for the fee due.

Please address all correspondence concerning the present application to:

E. Joseph Gess  
Burns, Doane, Swecker & Mathis, L.L.P.  
P.O. Box 1404  
Alexandria, Virginia 22313-1404.

The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in triplicate.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: June 30, 1998

By:



Nhat D. Phan  
Registration No. 39,581

P.O. Box 1404  
Alexandria, Virginia 22313-1404  
(703) 836-6620

UNITED STATES PATENT APPLICATION

FOR

MULTIPLE ASM OBIGGS WITH DIFFERENT  
PERMEABILITY AND SELECTIVITY MEMBRANES

BY

KARL S. BEERS

and

CHARLES L. ANDERSON

Burns, Doane, Swecker & Mathis, L.L.P.  
P.O. Box 1404  
Alexandria, VA 22313-1404  
(703) 836-6620

Attorney's Docket No. 016499-546

# **MULTIPLE ASM OBIGGS WITH DIFFERENT PERMEABILITY AND SELECTIVITY MEMBRANES**

## **BACKGROUND OF THE INVENTION**

### 5     1.     **Field of the Invention**

          The present invention generally relates to a method and system for inerting aircraft fuel tanks. The invention particularly relates to a method and system for providing nitrogen-enriched air (NEA) to aircraft fuel tanks using multiple air separation modules (ASMs). The ASMs employ membranes having different  
10     permeabilities and selectivities which are particularly selected to meet the varying NEA needs of the aircraft performance requirements.

### 2.     **Description of the Related Art**

          It is generally recognized that fuel vapors in an enclosed area such as a fuel  
15     tank may result in flame propagation or even an explosion if sufficient oxygen is present. The threat of an explosion, however, can be substantially reduced if the oxygen concentration in the fuel tank is lowered to 9% by volume or less.

          Due to the risk of an explosion, some vehicles, particularly aircrafts, have been equipped with on-board inert gas generating systems (OBIGGS). The  
20     OBIGGS are intended to provide a supply of nitrogen or nitrogen-enriched gas to fill the vapor space or ullage in the fuel tank in order to lower its oxygen content and thereby reduce the possibility of an explosion.

Various OBIGGS have been proposed in the art. However, there remains a continuing need in the art for OBIGGS that have reduced size, weight, and operating cost, but yet can provide a sufficient amount and purity of NEA to inert, for example, aircraft fuel tanks during a variety of different operating conditions.

5

### SUMMARY OF THE INVENTION

The present invention is intended to address this need in the art. It takes particular advantage of the fact that an aircraft has varying inert gas requirements during the course of its flight. For example, during level altitude or cruising, a relatively low rate of NEA flow is required to replace the fuel being used. During a descent maneuver such as landing, a higher rate of NEA flow is required to keep the internal pressure in the fuel tanks equal to the external pressure to minimize the in-rush of 21 % by volume O<sub>2</sub> air and to maintain the ullage oxygen concentration at 9% by volume or lower. Likewise, during an ascent maneuver such as takeoff, a higher flow rate of NEA is required to inert the fuel tanks because of the evolution of dissolved O<sub>2</sub> from the fuel due to the drop in the atmospheric pressure.

Briefly, the present invention employs multiple gas separation modules which contain membranes having different permeabilities and selectivities to separate compressed air into NEA. The membrane modules are advantageously selected to provide the NEA required to inert the aircraft fuel tanks based on the

aircraft's particular performance requirements, while minimizing the system's overall size, weight, and operating cost.

More particularly, in its first aspect, the present invention relates to a method for inerting an aircraft fuel tank. The method comprises the steps of:

- 5           (a)     contacting compressed air with one or more first membrane modules at conditions effective to produce a first nitrogen-enriched air stream;
- (b)     introducing the first nitrogen-enriched air stream into the fuel tank during periods of low demand for nitrogen-enriched air;
- (c)     contacting compressed air with one or more second membrane  
10       modules at conditions effective to produce a second nitrogen-enriched air stream;  
          and
- (d)     introducing the second nitrogen-enriched air stream into the fuel tank during periods of high demand for nitrogen-enriched air. The first membrane modules have a lower O<sub>2</sub> permeance and a higher O<sub>2</sub>/N<sub>2</sub> selectivity than the second  
15       membrane modules.

In its second aspect, the present invention relates to a system for inerting an aircraft fuel tank. The system comprises:

- (a)     one or more first membrane modules for separating compressed air into a first permeate stream comprising oxygen-enriched air and a first retentate  
20       stream comprising nitrogen-enriched air;
- (b)     a first conduit for conveying the first retentate stream into the fuel tank during periods of low demand for nitrogen-enriched air;

(c) one or more second membrane modules for separating compressed air into a second permeate stream comprising oxygen-enriched air and a second retentate stream comprising nitrogen-enriched air; and

(d) a second conduit for conveying the second retentate stream into the fuel tank during periods of high demand for nitrogen-enriched air. The first membrane modules have a lower O<sub>2</sub> permeance and a higher O<sub>2</sub>/N<sub>2</sub> selectivity than the second membrane modules.

As used herein, the "periods of low demand for nitrogen-enriched air" refer to instances when the volumetric output of the one or more first membrane modules can produce enough NEA to maintain the oxygen concentration in the ullage of the aircraft fuel tank below the explosive limit, which is currently believed to be about 9% by volume or less. An example of such a period includes while the aircraft is cruising or is maintaining a level altitude.

On the other hand, the "periods of high demand for nitrogen-enriched air" refer to instances when the volumetric output of the one or more first membrane modules cannot produce enough NEA to maintain the oxygen concentration in the ullage of the aircraft fuel tank below the explosive limit. Such periods include during ascent, descent, and mid-air refueling.

## DETAILED DESCRIPTION OF THE INVENTION

During level altitude or the cruising phase of an aircraft's flight, less NEA is required to maintain the oxygen concentration in the ullage of a fuel tank below

the explosive limit. Thus, it is possible to use more energy efficient, higher performance membrane modules to supply the required NEA.

Accordingly, during periods of low NEA demand, compressed air is contacted with one or more first membrane modules at conditions effective to  
5 produce a first NEA stream. The compressed air can be from any source on board the aircraft such as engine bleed air, bleed air from the aircraft's environmental control system, or air from an independent compressor. Regardless of the source of the compressed air, it typically contains about 21 % by volume O<sub>2</sub>, 78% by volume N<sub>2</sub>, and traces of Ar and other gases. The air, however, may  
10 have a lower oxygen concentration at higher altitudes.

There is a relationship between the compressed air pressure, which translates to the driving force across the membrane, and the number of membrane modules required to perform the desired separation, and thus the overall size and weight of the system. For example, it has been discovered that increasing the  
15 compressed air pressure from 30 psig (308.0 kPa) to 50 psig (445.8 kPa) can reduce the module weight as well as its overall size by over 50%. Therefore, it is preferred that the compressed air has a pressure ranging from 10 psig (170.2 kPa) to 300 psig (2168.3 kPa), and more preferably, from 20 psig (239.1 kPa) to 100 psig (790.3 kPa). The driving force across the membrane can also be effected or  
20 enhanced by applying a vacuum on the permeate side of the membrane.

The first membrane modules contain a membrane material that preferentially permeates oxygen and retains nitrogen. In addition, they are



advantageously selected to have a lower O<sub>2</sub> permeance and a higher O<sub>2</sub>/N<sub>2</sub> selectivity than the second membrane modules. Preferably, the first membrane modules are selected to have an O<sub>2</sub> permeance of at least 10 GPU (10<sup>-6</sup> cm<sup>3</sup>/cm<sup>2</sup>·sec·cm-hg) and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 4.0 measured at operating  
5 conditions. More preferably, the first membrane modules have an O<sub>2</sub> permeance of at least 30 GPU (10<sup>-6</sup> cm<sup>3</sup>/cm<sup>2</sup>·sec·cm-hg) and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 5.0.

Membrane modules having such properties are known in the art. They are generally referred to as high performance membranes. For example, but without  
10 limitation, the membrane material in the first modules can be made of cellulose derivatives, polyamides, polyimides, polyamide-imides, polysulfones, copolymers and blends thereof. The membrane material is preferably in the form of asymmetric or composite hollow fibers, but may be in roll form, and plate and frame cartridges. More preferably, the first membrane modules contain hollow  
15 fibers described in one of U.S. Patent Nos. 4,230,463; 4,983,191; 5,015,270; 5,085,676; and 5,096,468, and EP 0 207 721 A2; the contents of which are hereby incorporated by reference.

The temperature of the compressed air and/or the membrane has an affect on the permeability and selectivity of the membrane modules. For example, for a  
20 given compressed air flow rate and pressure, the permeability of the membrane can increase as the temperature increases. Thus, it is preferable to contact the compressed air with the first membrane modules at a temperature ranging from

0°C to 100°C, and preferably from 0°C to 80°C. Of course, the compressed air can be heated prior to the contacting step in order to maximize the productivity of the membrane modules.

The flow rate of the compressed air to the first membrane modules can vary, depending on the particular NEA requirements of the aircraft fuel tanks. Generally, however, the flow rate of the compressed air into the first membrane modules should be sufficient to provide enough NEA to the fuel tanks to maintain an oxygen concentration in the ullage space below the explosive range, i.e., 9% by volume O<sub>2</sub> or less, during periods of low demand such as cruising.

The first NEA stream preferably has a flow rate of 0.05 lbs/ min (0.023 kg/min) to 20 lbs/min (9.091 kg/min) and an oxygen content of 9% by volume or less. More preferably, the first NEA stream has a flow rate of 0.5 lbs/min (0.227 kg/min) to 2.0 lbs/min (0.909 kg/min) and an oxygen content of 5% by volume or less. The first NEA stream is advantageously introduced into the fuel tank of an aircraft during periods of low NEA demand to maintain the oxygen content in the ullage of the fuel tank below the explosive range.

During certain flight maneuvers such as ascent and descent, the first membrane modules may not be able to provide sufficient NEA flow to the aircraft's fuel tank to maintain the oxygen concentration in the ullage below the explosive limit. Thus, it would be advantageous to employ less efficient, but higher productivity membrane modules to supply the required NEA.

Like the first membrane modules, the second membrane modules contain a membrane material that preferentially permeates oxygen and retains nitrogen. The membrane material in the second modules, however, is preferably highly permeable so as to fulfill the high demand of NEA during flight periods such as ascent and descent.

The second membrane modules preferably have an O<sub>2</sub> permeance of at least 100 GPU (10<sup>-6</sup> cm<sup>3</sup>/cm<sup>2</sup>·sec·cm-hg) and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 1.5 measured at operating conditions. More preferably, the second membrane modules have an O<sub>2</sub> permeance of at least 200 GPU (10<sup>-6</sup> cm<sup>3</sup>/cm<sup>2</sup>·sec·cm-hg) and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 2.0. These membrane modules are usually referred to as having ultra high permeability.

Various such membrane materials are known in the art. For example, but without limitation, cellulose derivatives, polyamides, polyimides, polyamide-imides, polysulfones, copolymers and blends thereof have been found to be useful. The membrane materials are preferably in the form of asymmetric or composite hollow fibers, but may be in roll form, and plate and frame cartridges. More preferably, the second membrane modules contain hollow fibers described in one of U.S. Patent Nos. 4,717,394; 5,034,024; and 5,051,114, and EP 0 207 721 A2; the contents of which are hereby incorporated by reference.

The compressed air can be contacted with the second membrane modules at the same general conditions as it is contacted with the first membrane modules. However, because more NEA is needed to fill the ullage space during high NEA

demand periods, the second NEA stream generally, but not necessarily has a higher flow rate and a higher oxygen content than the first NEA stream.

The second NEA stream preferably has a flow rate of 5 lbs/min (2.273 kg/min) to 100 lbs/min (45.455 kg/min) and an oxygen content of 9% by volume or less. More preferably, the second NEA stream has a flow rate of 10 lbs/min (4.545 kg/min) to 50 lbs/min (22.727 kg/min). This second NEA stream is advantageously introduced into the fuel tank of an aircraft during periods of high NEA demand such as ascent and descent to maintain the oxygen content in the fuel tank below the explosive limit.

The second NEA stream can be introduced into the fuel tank in combination with or in lieu of the first NEA stream, depending on the particular NEA requirements of the aircraft at the time. To minimize energy consumption, one or more of the membrane modules in each set may be turned off when the NEA from those modules is not required to meet the demand of the aircraft.

Moreover, either one or both of the first and second NEA streams can be introduced directly into the liquid fuel in the fuel tank, such as through a bubbler, to scrub or remove dissolved O<sub>2</sub> from the fuel. Preferably, the first NEA stream is introduced into the liquid fuel. As those skilled in the art will readily appreciate, such an embodiment can reduce the risk of an explosion even further.

For both sets of membrane modules, if more than one is employed in each set, the modules in each set can be arranged in series and/or in parallel. If employed in series, the NEA retentate stream of one module can be used as a feed

to another module in that set. In addition, either the permeate stream or the retentate stream or both can be recycled to a previous module to maximize the separation efficiency of the modules.

In its second aspect, the present invention relates a system for carrying out the above-described process. The system contains two sets of membrane modules for separating compressed air into a permeate stream comprising oxygen-enriched air and a retentate stream comprising nitrogen-enriched air. Each set has a different permeability and selectivity. In particular, the first set of membrane modules is selected to have a lower  $O_2$  permeance, but a higher  $O_2/N_2$  selectivity than the second set of membrane modules.

Preferably, the first membrane modules have an  $O_2$  permeance of at least 10 GPU ( $10^{-6} \text{ cm}^3/\text{cm}^2 \cdot \text{sec} \cdot \text{cm-hg}$ ) and an  $O_2/N_2$  selectivity of at least 4.0, and the second membrane modules have an  $O_2$  permeance of at least 100 GPU ( $10^{-6} \text{ cm}^3/\text{cm}^2 \cdot \text{sec} \cdot \text{cm-hg}$ ) and an  $O_2/N_2$  selectivity of at least 1.5. More preferably, the first membrane modules have an  $O_2$  permeance of at least 30 GPU ( $10^{-6} \text{ cm}^3/\text{cm}^2 \cdot \text{sec} \cdot \text{cm-hg}$ ) and an  $O_2/N_2$  selectivity of at least 5.0, and the second membrane modules have an  $O_2$  permeance of at least 200 GPU ( $10^{-6} \text{ cm}^3/\text{cm}^2 \cdot \text{sec} \cdot \text{cm-hg}$ ) and an  $O_2/N_2$  selectivity of at least 2.0.

Both sets of membrane modules contain a compressed air inlet and an NEA stream outlet. Each NEA stream outlet is connected to a conduit which is provided to convey the NEA stream from the membrane modules to the ullage of the aircraft fuel tank. Each outlet can be connected to a separate conduit.

Alternatively, the outlets can be connected to a common conduit which carries the NEA into the fuel tank as needed. The system can also contain a third conduit for introducing the first NEA stream or the second NEA stream or both into the liquid fuel in the aircraft fuel tank in order to liberate at least a portion of O<sub>2</sub> dissolved in the fuel.

The first membrane modules and the second membrane modules can be arranged in a bundle-in-bundle configuration as described in U.S. Patent No. 5,013,331; the content of which is hereby incorporated by reference. For example, one first membrane module can be arranged as the outer bundle while one second membrane module can be the inner bundle. Such an arrangement can provide significant reductions in the overall size and weight of the system.

While the invention has been described with reference to preferred embodiments, it is to be understood that variations and modifications may be resorted to as will be apparent to those skilled in the art. Such variations and modifications are to be considered within the purview and scope of the invention as defined by the claims appended hereto.

WHAT IS CLAIMED IS:

1. A method for inerting an aircraft fuel tank, said method comprising the steps of:

- (a) contacting compressed air with one or more first membrane  
5 modules at conditions effective to produce a first nitrogen-enriched air stream;
- (b) introducing said first nitrogen-enriched air stream into said fuel tank during periods of low demand for nitrogen-enriched air;
- (c) contacting compressed air with one or more second membrane modules at conditions effective to produce a second nitrogen-enriched air stream;  
10 and
- (d) introducing said second nitrogen-enriched air stream into said fuel tank during periods of high demand for nitrogen-enriched air,
- wherein said first membrane modules have a lower O<sub>2</sub> permeance and a higher O<sub>2</sub>/N<sub>2</sub> selectivity than said second membrane modules.

15

2. The method according to claim 1, wherein said low demand periods include cruising.

3. The method according to claim 1, wherein said high demand  
20 periods include ascent or descent or both.

4. The method according to claim 1, further comprising introducing at least one of said first nitrogen-enriched air stream and said second nitrogen-enriched air stream into the fuel in said fuel tank at conditions effective to liberate at least a portion of dissolved O<sub>2</sub> in the fuel.

5

5. The method according to claim 4, wherein said first nitrogen-enriched air stream is introduced into the fuel in the fuel tank to liberate at least a portion of dissolved O<sub>2</sub> in the fuel.

10

6. The method according to claim 1, wherein said first nitrogen-enriched air stream has a lower flow rate than said second nitrogen-enriched air stream.

15

7. The method according to claim 1, wherein said first nitrogen-enriched air stream has a flow rate of 0.05 to 20 lbs/min at 9% by volume O<sub>2</sub> or less, and said second nitrogen-enriched air stream has a flow rate of 5 to 100 lbs/min at 9% by volume O<sub>2</sub> or less.

20

8. The method according to claim 7, wherein said first nitrogen-enriched air stream has a flow rate of 0.5 to 2.0 lbs/min at 5% by volume O<sub>2</sub> or less, and said second nitrogen-enriched air stream has a flow rate of 5 to 50 lbs/min at 9% by volume O<sub>2</sub> or less.



9. The method according to claim 1, wherein said first membrane modules have an O<sub>2</sub> permeance of at least 10 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 4.0, and said second membrane modules have an O<sub>2</sub> permeance of at least 100 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 1.5.

5

10. The method according to claim 9, wherein said first membrane modules have an O<sub>2</sub> permeance of at least 30 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 5.0, and said second membrane modules have an O<sub>2</sub> permeance of at least 200 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 2.

10

11. The method according to claim 1, wherein said compressed air comprises bleed air.

12. The method according to claim 1, wherein said compressed air has a pressure of 10 to 300 psig.

15

13. The method according to claim 1, which comprises introducing said first nitrogen-enriched air stream and said second nitrogen-enriched air stream into said fuel tank during periods of high demand for nitrogen-enriched air.

20

14. A method for inerting an aircraft fuel tank, said method comprising the steps of:

- (a) contacting compressed air with one or more first membrane modules at conditions effective to produce a first nitrogen-enriched air stream;
- (b) introducing said first nitrogen-enriched air stream into said fuel tank during cruising;
- 5 (c) contacting compressed air with one or more second membrane modules at conditions effective to produce a second nitrogen-enriched air stream; and
- (d) introducing said second nitrogen-enriched air stream into said fuel tank during ascent or descent or both,
- 10 wherein said first membrane modules have a lower  $O_2$  permeance and a higher  $O_2/N_2$  selectivity than said second membrane modules.

15 15. The method according to claim 14, further comprising introducing at least one of said first nitrogen-enriched air stream and said second nitrogen-enriched air stream into the fuel in said fuel tank at conditions effective to liberate at least a portion of dissolved  $O_2$  in the fuel.

20 16. The method according to claim 15, wherein said first nitrogen-enriched air stream is introduced into the fuel in the fuel tank to liberate at least a portion of dissolved  $O_2$  in the fuel.

17. The method according to claim 14, wherein said first nitrogen-enriched air stream has a lower flow rate than said second nitrogen-enriched air stream.

5 18. The method according to claim 14, wherein said first nitrogen-enriched air stream has a flow rate of 0.05 to 20 lbs/min at 9% by volume O<sub>2</sub> or less, and said second nitrogen-enriched air stream has a flow rate of 5 to 100 lbs/min at 9% by volume O<sub>2</sub> or less.

10 19. The method according to claim 18, wherein said first nitrogen-enriched air stream has a flow rate of 0.5 to 2.0 lbs/min at 5% by volume O<sub>2</sub> or less, and said second nitrogen-enriched air stream has a flow rate of 5 to 50 lbs/min at 9% by volume O<sub>2</sub> or less.

15 20. The method according to claim 14, wherein said first membrane modules have an O<sub>2</sub> permeance of at least 10 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 4.0, and said second membrane modules have an O<sub>2</sub> permeance of at least 100 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of greater than 1.5.

20 21. The method according to claim 20, wherein said first membrane modules have an O<sub>2</sub> permeance of at least 30 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of at

least 5.0, and said second membrane modules have an O<sub>2</sub> permeance of at least 200 GPU and an O<sub>2</sub>/N<sub>2</sub> selectivity of at least 2.

22. The method according to claim 14, wherein said compressed air  
5 comprises bleed air.

23. The method according to claim 14, wherein said compressed air has  
a pressure of 10 to 300 psig.

10 24. The method according to claim 14, which comprises introducing  
said first nitrogen-enriched air stream and said second nitrogen-enriched air stream  
into said fuel tank during ascent or descent or both.

25. A system for inerting an aircraft fuel tank, said system comprising:  
15 (a) one or more first membrane modules for separating compressed air  
into a first permeate stream comprising oxygen-enriched air and a first retentate  
stream comprising nitrogen-enriched air;

(b) a first conduit for conveying said first retentate stream into said fuel  
tank during periods of low demand for nitrogen-enriched air;

20 (c) one or more second membrane modules for separating compressed  
air into a second permeate stream comprising oxygen-enriched air and a second  
retentate stream comprising nitrogen-enriched air; and

(d) a second conduit for conveying said second retentate stream into said fuel tank during periods of high demand for nitrogen-enriched air,

wherein said first membrane modules have a lower  $O_2$  permeance and a higher  $O_2/N_2$  selectivity than said second membrane modules.

5

26. The system according to claim 25, further comprising a third conduit for introducing at least one of said first retentate stream and said second retentate stream into the fuel in said fuel tank to liberate at least a portion of dissolved  $O_2$  in the fuel.

10

27. The system according to claim 25, wherein said first membrane modules have an  $O_2$  permeance of at least 10 GPU and an  $O_2/N_2$  selectivity of at least 4.0, and said second membrane modules have an  $O_2$  permeance of at least 100 GPU and an  $O_2/N_2$  selectivity of at least 1.5.

15

28. The system according to claim 27, wherein said first membrane modules have an  $O_2$  permeance of at least 30 GPU and an  $O_2/N_2$  selectivity of at least 5.0, and said second membrane modules have an  $O_2$  permeance of at least 200 GPU and an  $O_2/N_2$  selectivity of at least 2.

20

29. The system according to claim 25, wherein said first membrane modules and said second membrane modules are arranged in a bundle-in-bundle configuration.

5           30. The system according to claim 29, wherein said first conduit and said second conduit have common portions.

### ABSTRACT OF THE DISCLOSURE

A method and system for providing nitrogen-enriched air (NEA) to aircraft fuel tanks using multiple air separation modules (ASMs). The ASMs employ membranes having different permeabilities and selectivities which are particularly  
5 selected to meet the varying NEA needs of the fuel tanks during flight.

**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR UTILITY PATENT APPLICATION**

Attorney's Docket No.  
016499-546

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

MULTIPLE ASM OBIGGS WITH DIFFERENT PERMEABILITY

AND SELECTIVITY MEMBRANES

the specification of which

(check one)

☒ is attached hereto;

☐ was filed on \_\_\_\_\_ as

Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_;  
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);


I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 365 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:



<b>COMBINED DECLARATION AND POWER OF ATTORNEY</b>			Attorney's Docket No. 016499-546																																																																															
COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED																																																																															
			YES_ NO_																																																																															
			YES_ NO_																																																																															
<p>I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">William L. Mathis</td> <td style="width: 10%;">17,337</td> <td style="width: 33%;">Robert G. Mukai</td> <td style="width: 10%;">28,531</td> <td style="width: 33%;">William H. Benz</td> <td style="width: 10%;">25,952</td> </tr> <tr> <td>Peter H. Smolka</td> <td>15,913</td> <td>George A. Hovanec, Jr.</td> <td>28,223</td> <td>Peter K. Skiff</td> <td>31,917</td> </tr> <tr> <td>Robert S. Swecker</td> <td>19,885</td> <td>James A. LaBarre</td> <td>28,632</td> <td>Richard J. McGrath</td> <td>29,195</td> </tr> <tr> <td>Platon N. Mandros</td> <td>22,124</td> <td>E. Joseph Gess</td> <td>28,510</td> <td>Matthew L. Schneider</td> <td>32,814</td> </tr> <tr> <td>Benton S. Duffett, Jr.</td> <td>22,030</td> <td>R. Danny Huntington</td> <td>27,903</td> <td>Michael G. Savage</td> <td>32,596</td> </tr> <tr> <td>Joseph R. Magnone</td> <td>24,239</td> <td>Eric H. Weisblatt</td> <td>30,505</td> <td>Gerald F. Swiss</td> <td>30,113</td> </tr> <tr> <td>Norman H. Stepno</td> <td>22,716</td> <td>James W. Peterson</td> <td>26,057</td> <td>Michael J. Ure</td> <td>33,089</td> </tr> <tr> <td>Ronald L. Grudziecki</td> <td>24,970</td> <td>Teresa Stanek Rea</td> <td>30,427</td> <td>Charles F. Wieland III</td> <td>33,096</td> </tr> <tr> <td>Frederick G. Michaud, Jr.</td> <td>26,003</td> <td>Robert E. Krebs</td> <td>25,885</td> <td>Bruce T. Wieder</td> <td>33,815</td> </tr> <tr> <td>Alan E. Kopecki</td> <td>25,813</td> <td>William C. Rowland</td> <td>30,888</td> <td>Todd R. Walters</td> <td>34,040</td> </tr> <tr> <td>Regis E. Slutter</td> <td>26,999</td> <td>T. Gene Dillahunt</td> <td>25,423</td> <td></td> <td></td> </tr> <tr> <td>Samuel C. Miller, III</td> <td>27,360</td> <td>Patrick C. Keane</td> <td>32,858</td> <td></td> <td></td> </tr> <tr> <td>Ralph L. Freeland, Jr.</td> <td>16,110</td> <td>Bruce J. Boggs, Jr.</td> <td>32,344</td> <td></td> <td></td> </tr> </table>					William L. Mathis	17,337	Robert G. Mukai	28,531	William H. Benz	25,952	Peter H. Smolka	15,913	George A. Hovanec, Jr.	28,223	Peter K. Skiff	31,917	Robert S. Swecker	19,885	James A. LaBarre	28,632	Richard J. McGrath	29,195	Platon N. Mandros	22,124	E. Joseph Gess	28,510	Matthew L. Schneider	32,814	Benton S. Duffett, Jr.	22,030	R. Danny Huntington	27,903	Michael G. Savage	32,596	Joseph R. Magnone	24,239	Eric H. Weisblatt	30,505	Gerald F. Swiss	30,113	Norman H. Stepno	22,716	James W. Peterson	26,057	Michael J. Ure	33,089	Ronald L. Grudziecki	24,970	Teresa Stanek Rea	30,427	Charles F. Wieland III	33,096	Frederick G. Michaud, Jr.	26,003	Robert E. Krebs	25,885	Bruce T. Wieder	33,815	Alan E. Kopecki	25,813	William C. Rowland	30,888	Todd R. Walters	34,040	Regis E. Slutter	26,999	T. Gene Dillahunt	25,423			Samuel C. Miller, III	27,360	Patrick C. Keane	32,858			Ralph L. Freeland, Jr.	16,110	Bruce J. Boggs, Jr.	32,344		
William L. Mathis	17,337	Robert G. Mukai	28,531	William H. Benz	25,952																																																																													
Peter H. Smolka	15,913	George A. Hovanec, Jr.	28,223	Peter K. Skiff	31,917																																																																													
Robert S. Swecker	19,885	James A. LaBarre	28,632	Richard J. McGrath	29,195																																																																													
Platon N. Mandros	22,124	E. Joseph Gess	28,510	Matthew L. Schneider	32,814																																																																													
Benton S. Duffett, Jr.	22,030	R. Danny Huntington	27,903	Michael G. Savage	32,596																																																																													
Joseph R. Magnone	24,239	Eric H. Weisblatt	30,505	Gerald F. Swiss	30,113																																																																													
Norman H. Stepno	22,716	James W. Peterson	26,057	Michael J. Ure	33,089																																																																													
Ronald L. Grudziecki	24,970	Teresa Stanek Rea	30,427	Charles F. Wieland III	33,096																																																																													
Frederick G. Michaud, Jr.	26,003	Robert E. Krebs	25,885	Bruce T. Wieder	33,815																																																																													
Alan E. Kopecki	25,813	William C. Rowland	30,888	Todd R. Walters	34,040																																																																													
Regis E. Slutter	26,999	T. Gene Dillahunt	25,423																																																																															
Samuel C. Miller, III	27,360	Patrick C. Keane	32,858																																																																															
Ralph L. Freeland, Jr.	16,110	Bruce J. Boggs, Jr.	32,344																																																																															
<p>and: <u>Jeffrey L. Wendt, Esq., Reg. No. 32,952 and Nhat D. Phan, Esq., Reg. No. 39,581</u></p>																																																																																		
<p>Address all correspondence to: <u>E. Joseph Gess, Esq.</u>  <u>BURNS, DOANE, SWECKER &amp; MATHIS, L.L.P.</u>  <u>P.O. Box 1404</u>  <u>Alexandria, Virginia 22313-1404</u></p>																																																																																		
<p>Address all telephone calls to: <u>E. Joseph Gess</u> at (703) 836-6620.</p>																																																																																		
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p>																																																																																		
FULL NAME OF SOLE OR FIRST INVENTOR		SIGNATURE		DATE																																																																														
Karl S. Beers																																																																																		
RESIDENCE			CITIZENSHIP																																																																															
144 Westdale Road, Upper Darby, Pennsylvania 19082			U.S.A.																																																																															
POST OFFICE ADDRESS																																																																																		
144 Westdale Road, Upper Darby, Pennsylvania 19082																																																																																		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY		SIGNATURE		DATE																																																																														
Charles L. Anderson																																																																																		
RESIDENCE			CITIZENSHIP																																																																															
101 Maplewood Lane, Wilmington, Delaware 19810			U.S.A.																																																																															
POST OFFICE ADDRESS																																																																																		
101 Maplewood Lane, Wilmington, Delaware 19810																																																																																		

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

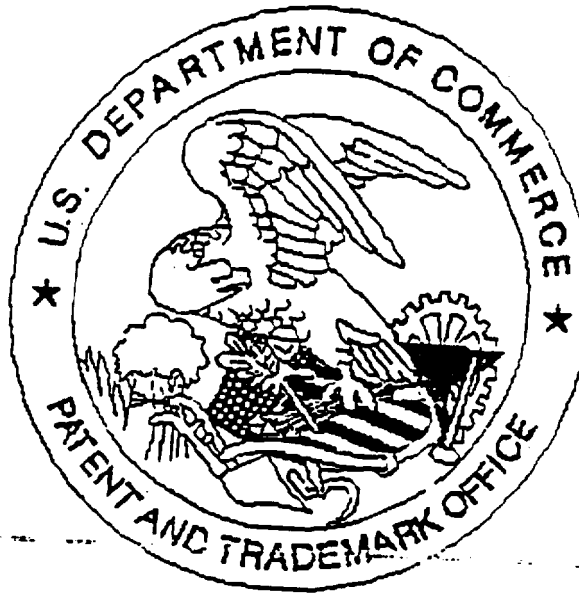

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
  - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11" Pages \_\_\_\_\_ do not meet these requirements.
  - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
  - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
  - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
  - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
  - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
  - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
  - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) \_\_\_\_\_ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) \_\_\_\_\_ are missing.
5. OTHER: NO Drawings Enclosed